


# SIGNALINE FT-68-R

FIXED TEMPERATURE LINEAR HEAT DETECTOR

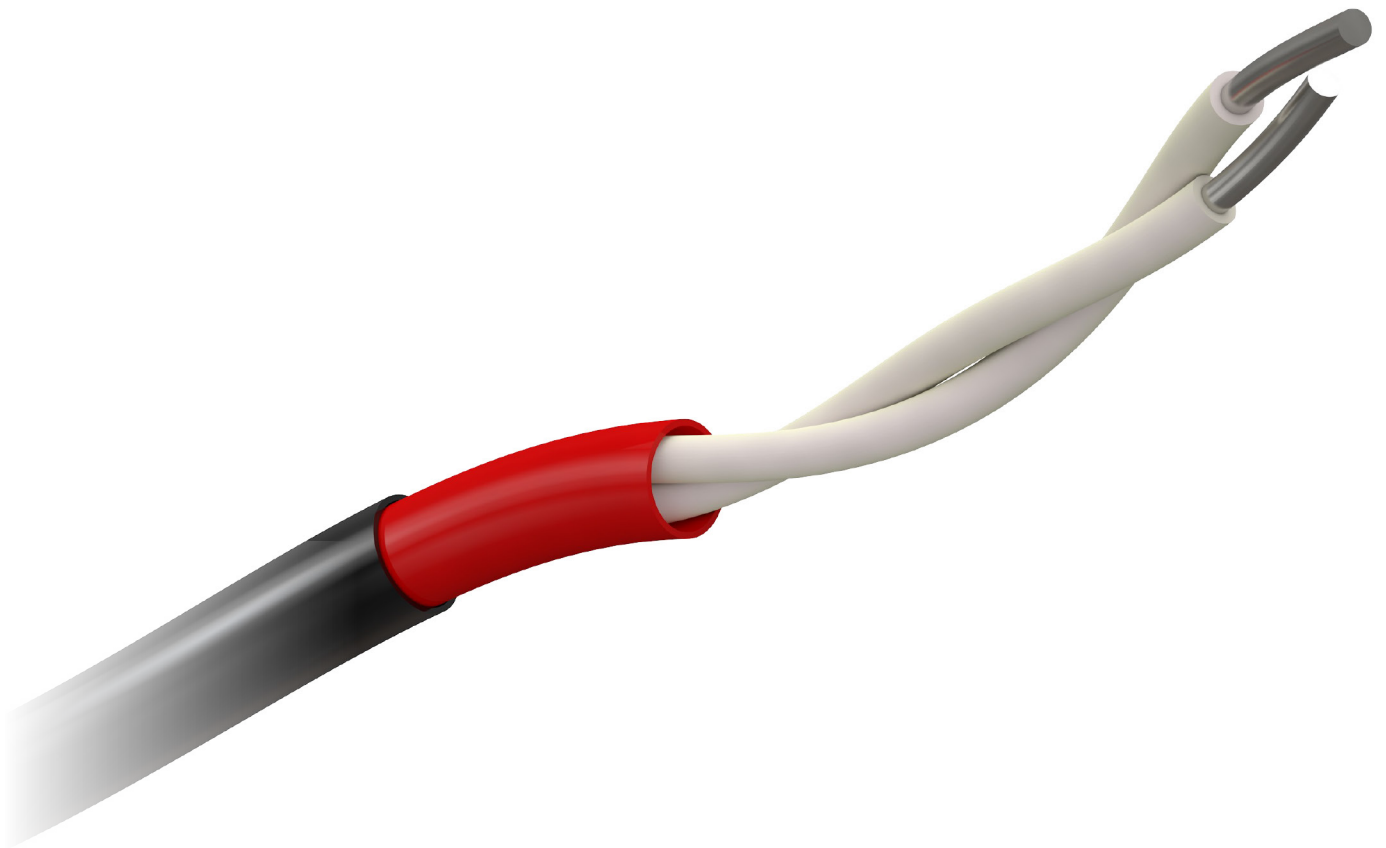

Fixed alarm temperature of 68°C

No false alarms

Up to 3,000 m per zone

Multiple fixing options

Fire  
detection



Signaline



# SIGNALINE FT-68-R

## FIXED TEMPERATURE LINEAR HEAT DETECTOR

<b>Product Code</b>	SL-FT-68-R
<b>Alarm temperature</b>	68°C (155°F)
<b>Max ambient temp.</b>	45°C (113°F)
<b>Conductor resistance</b>	0.1Ω/M or 0.029Ω/FT @20°C
<b>Max voltage</b>	42 V dc or 30 V ac
<b>Dielectric withstand (UL)</b>	500 V dc
<b>Tensile strength</b>	1700 N/mm <sup>2</sup>
<b>Minimum bend radius</b>	75 mm
<b>Overall diameter</b>	4.5 mm
<b>Weight</b>	16 kg/500 M
<b>Outer sheath material</b>	Chemical resistant nylon
<b>Colour</b>	Black
<b>Approvals</b>	UL, cUL

Signaline Fixed Temperature Linear Heat Detector (Signaline FT) can detect a build-up of heat anywhere along its length. When any point along the length of the cable reaches a predetermined temperature an alarm is initiated.

Signaline FT is available in multiple temperature settings and outer cover options, making the product suitable for use in a very wide range of applications.


Multiple fixing options and accessories are available.

Visit [vimpex.co.uk](http://vimpex.co.uk) for our complete catalogue.




Signaline FT cable is proudly manufactured in the UK


### Conventional Systems



### Addressable Systems

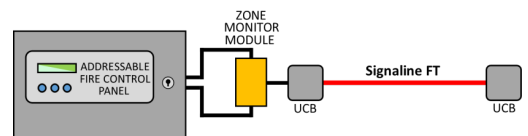

### Hazardous Areas

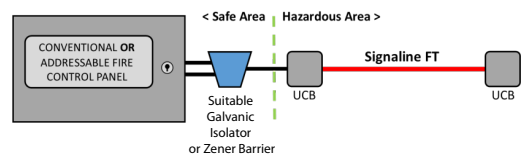

Compatible with the new Signaline LocaterPlus Dual Zone Monitor Module