

SIGNALINE FT-185-R

FIXED TEMPERATURE LINEAR HEAT DETECTOR



Fixed alarm temperature of 185°C

No false alarms

Up to 3,000 m per zone

Protective nylon sleeve

Fire
detection



Signaline



SIGNALINE FT-185-R

FIXED TEMPERATURE LINEAR HEAT DETECTOR

Product Code	SL-FT-185-R
Alarm temperature	185°C (365°F)
Max ambient temp.	125°C (257°F)
Conductor resistance	0.1Ω/M or 0.029Ω/FT @20°C
Max voltage	42 V dc or 30 V ac
Dielectric withstand (UL)	500 V dc
Tensile strength	1700 N/mm ²
Minimum bend radius	75 mm
Overall diameter	3.6 mm
Weight	12 kg/500 M
Outer sheath material	Chemical resistant nylon
Colour	Red
Approvals	UL, cUL

Signaline Fixed Temperature Linear Heat Detector (Signaline FT) can detect a build-up of heat anywhere along its length. When any point along the length of the cable reaches a predetermined temperature an alarm is initiated.

Signaline FT is available in multiple temperature settings and outer cover options, making the product suitable for use in a very wide range of applications.


Multiple fixing options and accessories are available.

Visit vimpex.co.uk for our complete catalogue.




Signaline FT cable is proudly manufactured in the UK


Conventional Systems



Addressable Systems

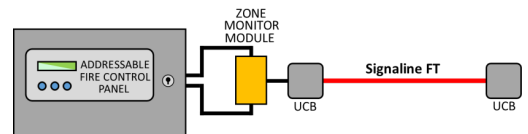

Hazardous Areas

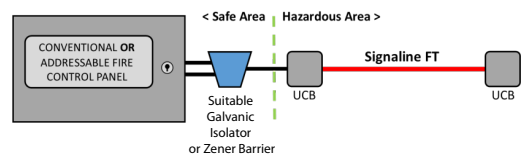

Compatible with the new Signaline LocatorPlus Dual Zone Monitor Module