

SIGNALINE FT-EOL-EN

EOL ENCLOSURE



Compatible with: Signaline FT-88-EN, FT-78-EN
IP66 enclosure
EN54-28:2016 approved
UV and chemical resistant



SIGNALINE FT-EOL-EN EOL ENCLOSURE

SPECIFICATION


Model	Signaline FT-EOL-EN
Dimensions	94 x 94 x 57 mm
Pack weight	0.1 kg
IP rating	IP66
Operating temp.	-35°C to +55°C
Terminal blocks	EOL: 2 x 5 mm Rising Clamp Cable: 2 x removable header 5 mm Rising clamp
Cable glands	2 x IP67 rated glands included
Mounting	Wall mounted 4 x Ø4 mm holes, 79 mm apart
Material	Polycarbonate enclosure with non-ageing polyurethane seal
Colour	Grey (RAL 7035)
Approvals	EN54-28:2016, UL File no.: S24913

The Signaline FT-EOL-EN End-of-Line Unit has been approved to EN54-28:2016 for use with the LocatorPlus-EN Control Unit and FT-78-EN or FT-88-EN Signaline Linear Heat Detection cables.

It is designed to effectively terminate up-to two zones of FT-78-EN or FT-88-EN cable in a secure, weatherproof enclosure.


Furthermore, the built in switches for testing a fault and alarm condition allow the integrity of the whole system to be functionally checked in situ, providing comprehensive testing and maintenance of the system.

Visit Vimpex.co.uk for our full range of heat detection solutions




Signaline FT-EN cable is proudly manufactured in the UK


Wiring Diagram

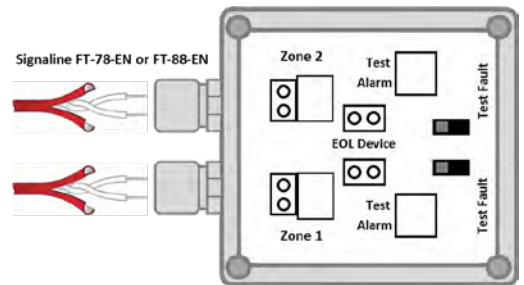

Conventional Systems

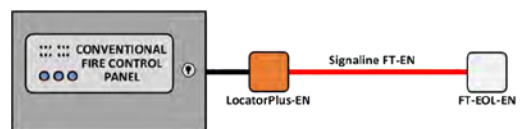

Addressable Systems

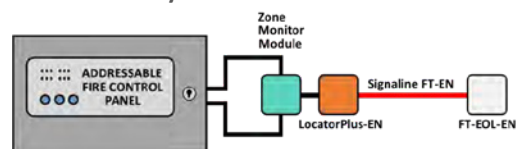

Hazardous Areas

