

HYDROSENSE CONVENTIONAL REMOTE INDICATOR



hydrosense™

A product designed for the Hydrosense conventional water leak detection system. Can be easily retrofitted to existing systems or incorporated as part of a new installation.

Use as a high or low level alarm indicator for floor probes or Hydrowire.

Features a blue LED that will illuminate when the alarm has been triggered.

FEATURES

- Ideal for new or retrofit projects
- Versatile backbox featuring 10 fixing points to allow easy mounting. (surface mount variants only)
- Incorporates 4 x round 20 mm knockouts and 1 x rectangular for surface conduit. (surface mount variants only)
- Flush or surface mounted

PART NUMBERS

- HS-WRLI-F: Hydrosense Conventional Remote Indicator, White, Flush Mount
- HS-WRLI-S: Hydrosense Conventional Remote Indicator, White, Surface Mount

SPECIFICATION

Compatible with:

Hydrowire Connection Interface HS-HWCI

Hydrosense HS Conventional Leak Detection Probe Junction Box HS-WLJB

Weight: 0.06 kg

Operating temperature: -5°C to +50°C

Material: Fire rated ABS

Operating humidity: 95% Non-condensing



FLUSH MOUNTED



SURFACE MOUNTED


HYDROSENSE CONVENTIONAL REMOTE INDICATOR



hydrosense™


TECHNICAL DRAWING

BACK BOX

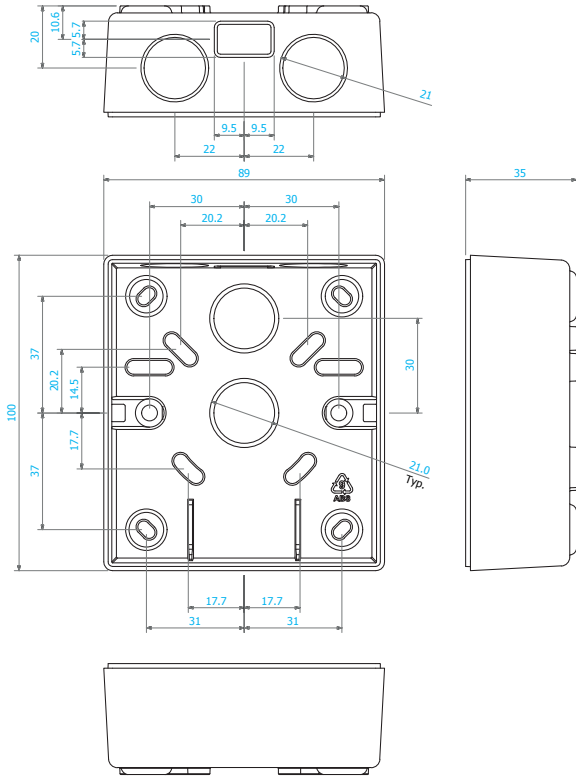

REMOTE INDICATOR

Dimensions: mm

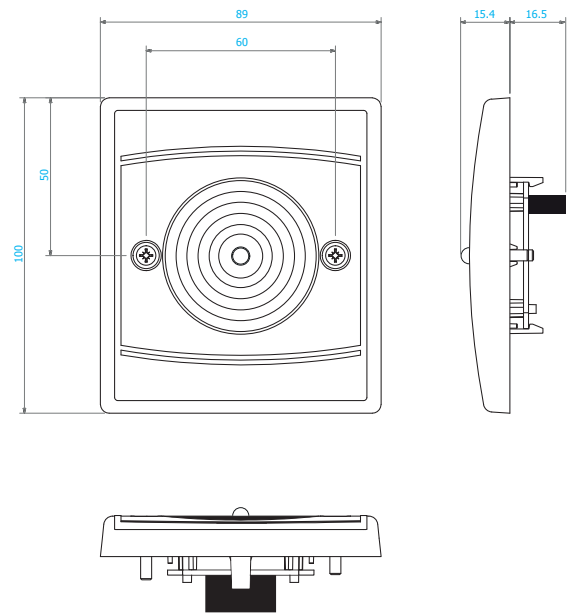

3700092/REV 3

We reserve the right to change or amend any design or specification in line with our policy of continuing development and improvement.

Vimpex LTD

Star Lane, Great Wakering,
Essex SS3 0PJ, UK
t. +44 (0) 1702 216999
e. sales@vimpex.co.uk
www.vimpex.co.uk

Vimpex Interguard AB

t. +46 (0) 36 37 10 65
e. sales@vimpex.se



Quality System Certificate No. 456
Assessed to ISO 9001